

# IF4W4 4-Wire to Party-Line System Interface

Analog Partyline Intercom Systems

Linking  
People  
Together



IF4W4 Front View

## Key Features and Benefits

- Interfaces TV cameras, 2-way radios, fiber-optic circuits, and other devices to Clear-Com party-line intercom
- Each interface has individual transmit, receive, and null controls
- Transmit output switchable between mic and line level, with transmit-level indicator
- Built-in test jack and oscillator enable quick nulling of the transmit/receive hybrid
- Selective party-line capability
- Accepts balanced or unbalanced 4-wire input
- Transformer isolated
- Terminal block and XLR connectors provided for each interface
- Powered by the Clear-Com line

Clear-Com Encore® is a 2-wire analog partyline system with intuitive plug-and-play design and superior “Clear-Com Sound.”

## Description

The IF4W4 modular 4-wire interface connects camera intercoms, two-way radios, fiber-optics, and other 4-wire devices to a standard Clear-Com intercom line. The 1-RU chassis holds up to four individual interface modules, each with its own 4-wire terminal block and XLR-3M connector to interface with Clear-Com.

The IF4W4 accepts balanced or unbalanced 4-wire input and is transformer isolated. It is powered by the Clear-Com intercom line, using standard two-conductor shielded mic cable.

## Front Panel Capabilities

Front-panel controls allow the user to adjust the operating parameters for each interface module, optimizing the interface between the 4-wire device and the party line. Capabilities include: adjusting the transmit and receive levels between the intercom system and the 4-wire line; optimizing the hybrid null balance; switching the transmit level between mic and line level; and emulating either a carbon or a dynamic microphone. A two-color LED transmit-level indicator gives a visual indication of send levels to the transmit lines.

A front-panel test jack is connected to a built-in oscillator. Using the null control and an earphone with a 1/8" plug or 4-pin headset, the user can quickly null the send/receive hybrid. Set-up switches allow the user to assign the interfaced devices to separate intercom channels, or to assign any or all to a single party line.

## Connections

Each interface module has its own set of transformer-isolated connectors. The terminal block provides a pair of connections for both transmit and receive signals, with a 600-ohm load across the receive line. An XLR-3M connector provides the link between the interface and the Clear-Com intercom line.

# IF4W4 4-Wire to Party-Line System Interface

Analog Partyline Intercom Systems

## Technical Specifications

dBu is an absolute measurement. 0dBu is referenced to 0.775 volts RMS

### Program Line Input

Input Impedance:  $\geq 1K$

### Partyline Output

Output Impedance:  $> 10K$

### Stage Announce/Balanced Line Out

Type: Balanced

Output Impedance:  $\geq 80$

Load Impedance:  $\geq 600$

### Frequency Response

Program Input - Partyline: 200 - 18kHz  $\pm 3dB$

Partyline - Line Out: 200 - 18kHz  $\pm 3dB$

### Max Distortion

Program Input - Partyline:  $\leq 0.2\%$

Partyline - Line Out:  $\leq 0.5\%$

### Noise

Program Input - Partyline:  $< -85dBu$

Partyline - Line Out:  $< -60dBu$

### Max Gain

Program Input - Partyline:  $\geq -16dB$

Partyline - Line Out:  $\geq 24dB$

### Min Gain

Program Input - Partyline:  $\leq -20dB$

Partyline - Line Out:  $\leq -45dB$

### Line Out LED Threshold

Green:  $-7dBu \pm 2dB$

Red:  $+5dBu \pm 2dB$

### Party Line LED Threshold

Green:  $-10dBu \pm 2dB$

Red:  $0dBu \pm 2dB$

### Power

Input Voltage Range: 20-30V DC

Input Current (Idle):  $\leq 40mA$

Input Current (Max):  $\leq 50mA$

### Rear Panel Connectors

Intercom: (4) XLR-3F (1 per channel)

4-Wire Terminal Block Connectors:

(4) Connectors (1 per channel)

4-Wire Transmit Level Switches:

(4) Switches (1 per channel)

### Front Panel Connectors

Headset: (1) XLR-4M

TS1 Earphone: (1) 3.5mm Jack Socket

### Front Panel Controls & Indicators

Green Level LED: (4) LEDs (1 per channel)

Red Level LED: (4) LEDs (1 per channel)

Link LED: (4) LEDs (1 per channel)

Power LED: (4) LEDs (1 per channel)

Null Test Button: (4) Buttons (1 per channel)

Receive Level Adjust:

(4) In controls (1 per channel)

Transmit Level Adjust:

(4) Out controls (1 per channel)

Nulling Adjust:

(12) Null controls (3 per channel)

Channel Link Switch:

(3) Link switches (A+B, A+C, A+D)

### Environmental:

32° - 122°F (0 - 50°C)

### Dimensions


19 x 1.75 x 7.75in (WxHxD)

(483 x 44.5 x 197mm)


### Weight

5.83lbs (2.65kg)

## IF4W4 Front Panel

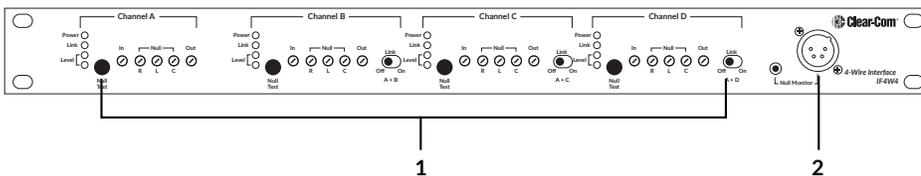

## IF4W4 Back Panel

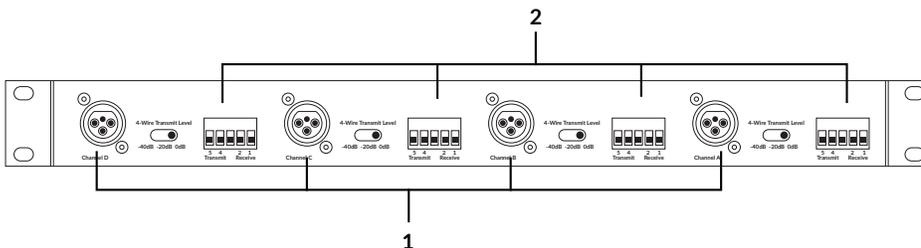

## Legend

### Front

1. Terminal block connector
2. XLR connector

### Back

1. XLR connector
2. Transmitter / receiver

## Order Code

IF4W4



[www.clearcom.com/  
encore-knowledge-center/](http://www.clearcom.com/encore-knowledge-center/)