


A.LEDA B-EYE K10



The A.leda B-EYE is a high performance wash light, a breathtaking beam light, and a creator of completely new spectacular visual effects. Its unparalleled versatility makes it an extremely interesting creative tool for all lighting designers.

B-EYE is first and foremost an excellent quality wash light. It is able to wash surfaces with colors at any distance, making the most of its light source. B-EYE is at least 20% brighter than any LED-wash with the same rated power, thanks to its special optical unit with a truly amazing lumen/watt ratio, designed and built by Clay Paky. The zoom ranges from 4° to 60° and it is therefore suitable both for environments with low ceilings (small theatres and TV studios, for example), where large angles are extremely useful, and for shows in arenas or large environments, where a tight zoom is perfect. When B-EYE beam is zoomed down to 4°, the "wash" light turns into a "beam" fixture. The B-EYE therefore becomes a surprising mid-air parallel effect light, capable of generating a pulsating beam of micro-rays, which may be controlled individually, each with its own colors and shades. All the parameters of each LED can be completely controlled. Lastly, B-EYE K20 and K10 introduces a completely new feature: the front lens may be rotated to create lots of small bright compositions, which may be opened and closed like petals. By adding colors and dynamic graphics, the B-EYE generates never-seen-before graphic light effects.

- Light Source: 15 W RGBW LEDs (the number of the LEDs depends on the model)
- Versatile, three operating modes: wash, beam, effects *
- Unique optical system, featuring unmatched zoom range (4°-60°) and even light spread
- Individual LED control for each parameter
- Invisible front grid
- Beam edge softening control (in wash mode) *
- Exclusive parallel beam consisting of an array of individually controllable micro-beams
- Enhanced electronic engine for dynamic beam pattern design, with digital accuracy and repeatability
- Rotating front lens for countless vortex effects, for aerial or "kaleidoscopic" projection use *
- White CT Emulation 2500-8000K
- RGB auto-tuning to lamp CT Emulation
- Tungsten Lamp Emulation
- 0-100% linear dimmer on a dedicated channel
- Adjustable speed stop/strobe effect, with instantaneous blackout
- Modular construction for easy maintenance
- Silent Operation

(*) A.leda B-EYE K20 and B-EYE K10 features only

(**) A.leda B-EYE K20, B-EYE K10 and B-EYE K10 Easy features only

DETAILS

POWER SUPPLIES

100-240V 50/60Hz

INPUT POWER

450VA

TOTAL OUTPUT

5,500 lm

LIGHT SOURCE

19 Osram Ostar RGBW LEDs
LED Nominal Wattage: 15W
LED Average Life: 50,000 h

OPTICS

4°-60° Electronic Zoom Range

EFFECTS SECTION

Three operating modes: wash, beam, FX (Kaleido effects)
Front Lens Bi-directional Rotation
Digital Wash-Beam Framing effect
Beam edge softening control (in Wash mode)
Pixel Patterning Macros with enhanced control
0-100% linear electronic dimmer
Adjustable speed stop/strobe effect, with instantaneous blackout
Dedicated channel for color temperature setting
White CT Emulation 2500-8000K
RGBW auto-tuning to lamp CT Emulation
Tungsten Lamp Emulation
Slow Strobe: 1 flash/sec; Fast Strobe: 25 flash/sec

CONTROL AND PROGRAMMING

Control channels: 21 basic channels + 76 pixel-mapping channels
DMX protocol signal: USITT DMX 512
Display: Graphic LCD backlit b/w Display
Pan/Tilt Resolution: 16 bit
Dimmer Resolution: 16 bit
Movement control: vectorial
DMX signal connection: 5 pole XLR input and output
Software upload through DMX input

BODY

Aluminium structure with die-cast plastic cover
Two side handles for transportation
PAN lock for transport and maintenance

MOVING BODY

Movement by means of two stepper motors, controlled by microprocessor
Automatic repositioning of PAN and TILT after accidental movement not controlled by control unit
Angle:
- PAN = 540°
- TILT = 210°

ELECTRONICS


Long-life auto-charging buffer battery
Preset color and graphic effect macros
Function reset controllable from a central control unit
Menu-driven internal self-test function
Art-Net / RDM
Display: backlit black-and-white graphic LCD display
Electronic check-up of every single parameter with error alarm
DMX level monitoring on each channel
Automatic internal data transmission error diagnostics
Firmware upgrade even when the unit is not connected to the power supply
Firmware transfer from one light to another

SAFETY DEVICES

Automatic power safety derating in case of overheating of the LED board
Forced ventilation

WORKING POSITION

Working in any position
Hanging system: with fast-lock omega clamps (1/4 turn) on the base

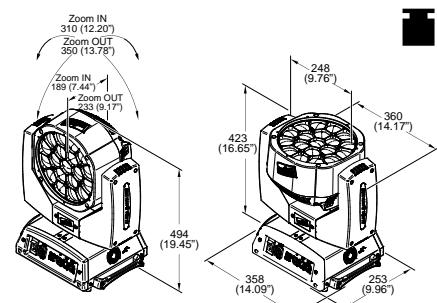

15 Kg (33.1 lbs)